


Product information

RKF - RKF 30/11-05


Industrial Connecting Solutions: Circular Connectors: 7/8", M23 Connectors: 7/8" Connectors: 7/8" Appliance Connectors: Female Connectors: RKF

<https://www.e-catalog.beldensolutions.com:443/link/57078-24228-256281-256289-256290-276567-276569-248891/en/RKF03-11/uistate>

Name	RKF
	
	Receptacle connector, 7/8" female connector, for front mounting, assembled stranded wire, solder contacts potted with epoxy, 3 poles, chassis side thread PG 11 (panel nut RSKF 11), O-ring enclosed separately.
Delivery informations	
Availability	available
Product description	
Type	RKF 30/11-05
Order No.	11263
Description	Receptacle connector, 7/8" female connector, for front mounting, assembled stranded wire, solder contacts potted with epoxy, 3 poles, chassis side thread PG 11 (panel nut RSKF 11), O-ring enclosed separately.
Number of contacts	3
Product characteristics	Oil resistance
Mechanical data	
Type of plug-in contact	Female connector
Thread	7/8"
Design of electrical connection	connector 7/8 inch
LED display present	✘
Environmental conditions	
Environmental temperature	-25 °C ... 90 °C
Degree of protection (IP), mounted	IP68
Pollution degree	3
Materials	
Housing material / Molded body	CuZn, nickel-plated
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	silver-plated and 0.3 microns gold-plated
Sealing material	Neoprene
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	12 A at 40°C, UL and notice derating
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2.5 kV eff./60 s
Insulation resistance	> 1 GΩ
Approvals	
Approvals	UL listed
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Scope of delivery and accessories	
Scope of delivery	O-ring enclosed separately

Industrial Connecting Solutions: Circular Connectors: 7/8", M23 Connectors: 7/8" Connectors: 7/8" Appliance Connectors: Female Connectors: RKF
<https://www.e-catalog.beldensolutions.com:443/link/57078-24228-256281-256289-256290-276567-276569-248891/en/RKF03-11/uistate>

Picture
 Drawing

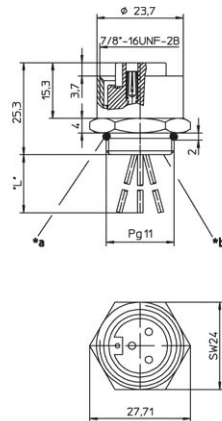

- *a O-Ring lose beigestellt
O-ring enclosed separately
- *b Leiteranschlussbereich vergossen
solder contacts potted with epoxy
- *L=0,3 m

Belden Deutschland GmbH
 Im Gewerbepark 2
 58579 Schalksmühle
 Germany
 Phone: +49 7127/14-1806
 E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.