

## Han Full High Density Module, crimp-F

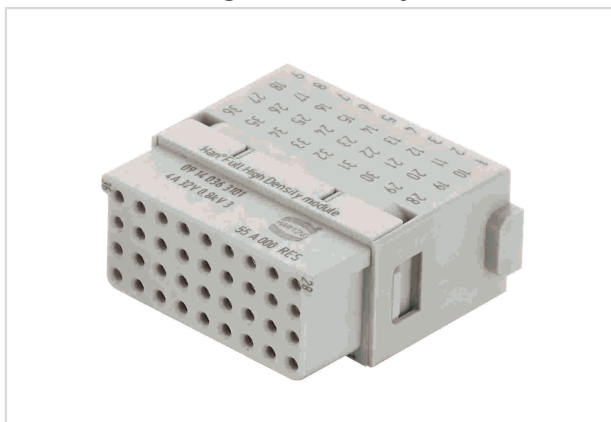


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 036 3101
Specification	Han Full High Density Module, crimp-F
HARTING eCatalogue	<a href="https://b2b.harting.com/09140363101">https://b2b.harting.com/09140363101</a>

### Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® Full High Density module

### Version

Termination method	Crimp termination
Gender	Female
Number of contacts	36
Details	Please order crimp contacts separately.

### Technical characteristics

Conductor cross-section	0.09 ... 0.52 mm <sup>2</sup>
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	>10 <sup>10</sup> Ω
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

### Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)



Pushing Performance

## Material properties

Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
----------------	-------------------------

## Commercial data

Packaging size	2
Net weight	6.2 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440217 Module for industrial connectors (power/signals)